


The B-Line[®]



Advantage

Underground Termination Enclosures

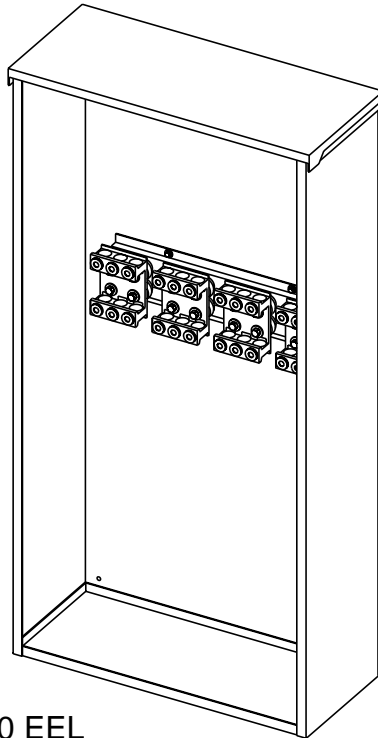

R9000 EEL

Features

- Built-in line & load terminals.
- Single or multiple cables per phase.
- High A.I.C. rating.
- Listed by Underwriters Laboratories.
- Approved by "EUSERC"*

* Check with your local utility



Field wiring terminals are provided in these bussed termination enclosures suitable for single cable or multiple cables per phase (in accordance with NEC/NFPA-70).

Catalog Number	A.I.C. Rating	AMPS	Volts	Service	Lug Wire Range
R9000CL	42,000	400	600	1Ø, 3W or 3Ø, 3W	(1) #4 AWG - 600 kcmil or (2) #1 - 250 kcmil
R9000CCL	42,000	400	600	3Ø, 4W	(1) #4 AWG - 600 kcmil or (2) #1 - 250 kcmil
R9000EL	65,000	800	600	1Ø, 3W or 3Ø, 3W	(3) #4 AWG - 600 kcmil or (6) #1 - 250 kcmil
R9000EEL	65,000	800	600	3Ø, 4W	(3) #4 AWG - 600 kcmil or (6) #1 - 250 kcmil
R9000FL	65,000	1200	600	1Ø, 3W or 3Ø, 3W	(4) #4 AWG - 600 kcmil or (8) #1 - 250 kcmil
R9000FFL	65,000	1200	600	3Ø, 4W	(4) #4 AWG - 600 kcmil or (8) #1 - 250 kcmil