


Tubular Stringer Style - 1 1/2" (Boxed)

- Ladder type cable runway for communication cabling pathways.
- Mounts to ceilings, walls, floors, relay racks, and electronic enclosures.
- 3/8" (9.5mm) x 1 1/2" (38.1mm) steel channel welded rungs spaced 12" (305mm) on center.
- All finishes are UL Classified as suitable as an equipment grounding conductor (File number E60548). Requires the use of bonding jumpers on painted finishes to maintain classification.
- Individually boxed in a carton suitable for shipping.
- Available palletized without individual boxes for larger installation projects.
- Material: ASTM A513 Grade 1008 steel tube
- Finish ___: Yellow Zinc (YZ),
Telco Gray Powder Coat (TG) or
Flat Black Powder Coat (FB)
(Other finishes are available upon request)



Note: For runway pans see pages 146 & 147

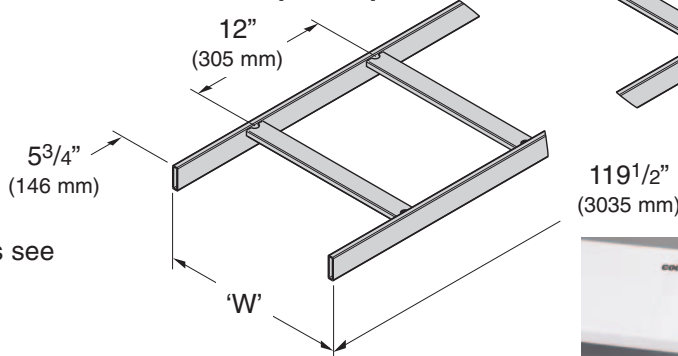

CABLE RUNWAYS & ACCESSORIES

Series Number	Stringer Dimensions	Span		Recommended Load		Max. Load @ 5/8" Deflection		Deflection Multiplier
		Ft.	(m)	Lbs./Ft.	(N/m)	Lbs./Ft.	(N/m)	
SB17U		4	(1.22)	149	(2174)	347	(5062)	0.0018
		5	(1.52)	95	(1386)	145	(2115)	0.0043
		6	(1.83)	66	(963)	70	(1021)	0.0089


UL Cross Sectional Area
0.40 in ² (2.58 cm ²)
Design Factors for (1) Rail
Area = .210 in ² (1.35 cm ²)
Sx = .066 in ³ (1.08 cm ³)
Ix = .050 in ⁴ (2.08 cm ⁴)

SB17U Tubular - 1 1/2" (38mm) Stringers

Part Number	'W' Width		Weight	
	In.	(mm)	Lbs.	(kg)
SB17U06B	6"	(152)	18.0	(8.2)
SB17U09B	9"	(228)	21.0	(9.5)
SB17U12B	12"	(305)	23.0	(10.4)
SB17U15B	15"	(381)	25.0	(11.3)
SB17U18B	18"	(457)	28.0	(12.7)
SB17U24B	24"	(609)	32.0	(14.5)
SB17U30B	30"	(762)	37.0	(16.8)
SB17U36B	36"	(914)	41.0	(18.6)



Rung Profile



3/8" x 1 1/2"
.060 thick

FB & TG are popular Bee List items