



- Secures and supports MC/AC cables as required by the NEC.
- Effectively organizes cables and eliminates derating issues.
- BRC5-1 secures up to four (4) runs of .430 to .560 diameter cable.
- BRC5-2 secures up to nine (9) runs of .430 to .560 diameter cable.
- BRC5-3 secures up to seven (7) runs of .560 to .690 diameter cable.
- Load Capacity: 50 lbs.



## MC/AC Cable Carrier to Beam Fastener

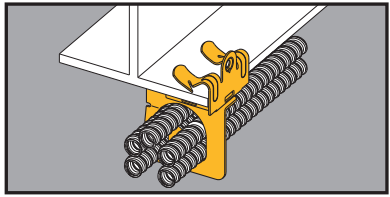

UPC/Part Number	Catalog Number	Flange Thickness	Box Qty.
782051 44066	<b>BRC51-U24</b>	1/8" - 1/4"	25
782051 44069	<b>BRC51-U58</b>	5/16" - 1/2"	25
782051 44072	<b>BRC51-U912</b>	9/16" - 3/4"	25
782051 44067	<b>BRC52-U24</b>	1/8" - 1/4"	25
782051 44070	<b>BRC52-U58</b>	5/16" - 1/2"	25
782051 44073	<b>BRC52-U912</b>	9/16" - 3/4"	25
782051 44068	<b>BRC53-U24</b>	1/8" - 1/4"	25
782051 44071	<b>BRC53-U58</b>	5/16" - 1/2"	25
782051 44074	<b>BRC53-U912</b>	9/16" - 3/4"	25



**Static Load Capacity**

75 Lbs.

Read safety/installation instruction sheets in packages before use.