


Hangers



- Suspend wire or plain and threaded rod from beam flanges 1/8" to 3/4" thick.
- Simply installed with a hammer.
- Static Load Capacity: 160 Lbs.

Rod To Beam Hangers

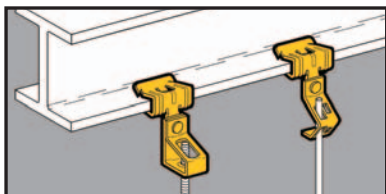

UPC/Part Number	Catalog Number	Flange Thickness	Description	Box Qty.
781011 18900	BH1-E-2-4	1/8" - 1/4"	#8 Wire or 1/4" Plain Rod	100
781011 18905	BH1-E-5-8	5/16" - 1/2"	#8 Wire or 1/4" Plain Rod	100
781011 18910	BH1-E-9-12	9/16" - 3/4"	#8 Wire or 1/4" Plain Rod	100

UPC/Part Number	Catalog Number	Flange Thickness	Plain Rod Size	Box Qty.
781011 18940	BH2-E-2-4	1/8" - 1/4"	3/8"	100
781011 18945	BH2-E-5-8	5/16" - 1/2"	3/8"	100
781011 18950	BH2-E-9-12	9/16" - 3/4"	3/8"	100

Read safety/installation instruction sheets in packages before use.



Rod To Beam Hangers



With Thread Impression



UPC/Part Number	Catalog Number	Flange Thickness	Threaded Rod Size	Box Qty.
781011 18980	BH4-E-2-4	1/8" - 1/4"	1/4"	100
781011 18985	BH4-E-5-8	5/16" - 1/2"	1/4"	100
781011 18990	BH4-E-9-12	9/16" - 3/4"	1/4"	100
781011 19060	BH6-E-2-4	1/8" - 1/4"	3/8"	100
781011 19065	BH6-E-5-8	5/16" - 1/2"	3/8"	100
781011 19070	BH6-E-9-12	9/16" - 3/4"	3/8"	100

Note: BH4 and BH6 have thread impressions.

UPC/Part Number	Catalog Number	Flange Thickness	Threaded Rod Size	Box Qty.
781011 19020	BH5-E-2-4*	1/8" - 1/4"	1/4" or 3/8"	100
781011 19025	BH5-E-5-8*	5/16" - 1/2"	1/4" or 3/8"	100
781011 19030	BH5-E-9-12*	9/16" - 3/4"	1/4" or 3/8"	100

*Nuts Required.

Read safety/installation instruction sheets in packages before use.