

Metered Pedestals

Pad Mount - Meter/Load - Split Load Style



CMP4011SLC-1

APPLICATION

- Utility meter, main disconnect and distribution panel

CONSTRUCTION

- Type 3R construction
- Pad mount
- Separate, sealable utility termination behind padlockable door
- Separate, sealable utility meter compartment behind a padlockable hood that provides full access to utility meter
- Padlockable main disconnect and distribution compartment with space available for custom control (consult sales office for special distribution and control requirements)
- Standard with circuit breaker main disconnect
- Sealable utility meter viewing window

STANDARDS


- Meets utility requirements
- UL listed
- Complies with ANSI C12.7
- Conforms to NEMA Standard for Type 3R
- Consult utility for compliance

FINISH

- ANSI 61 Gray (consult sales for other finish requirements)
- See page 150 for additional finishes

ACCESSORIES

- Fifth jaw kit #50365 (single phase systems)
- Filler plate kit #25319
- Screw type sealing ring #25016D
- Pad mounting base (see chart)

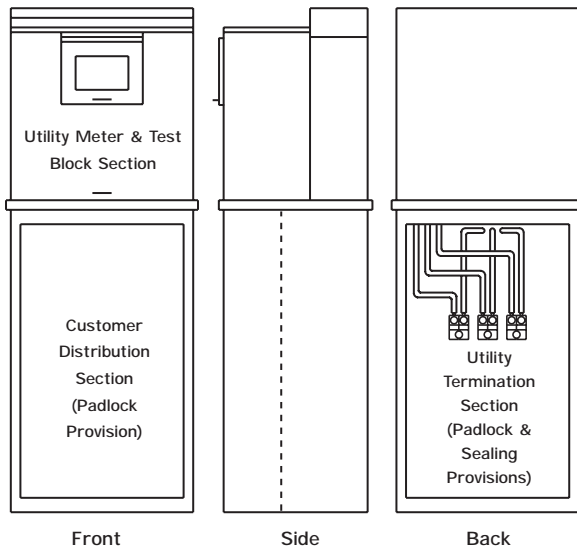

Pad Mount - Meter/Load - Split Load Style

CATALOG NUMBER	AMPACITY	VOLTAGE	PHASE	METER SOCKET	MAIN BREAKER	BRANCH CIRCUITS	BRANCH CIRCUIT TYPE	MOUNTING PAD
CMP4011SLC-1	100	240	1Ø, 3W	SS *	60/2 60/2	4 4	PLUG-IN PLUG-IN	MB1515

SS = Safety Socket - Test By-Pass
* This circuit is not metered