

Metered Pedestals

Pad Mount Metered

APPLICATION

- Utility meter and main disconnect

CONSTRUCTION

- Type 3R construction
- Pad mount
- Separate, sealable utility termination behind padlockable door
- Separate, sealable utility meter compartment behind padlockable door
- Padlockable main disconnect compartment
- Separate customer control and distribution section behind padlockable door
- Standard with circuit breaker main disconnect (class "T" fused pullout also available)
- Sealable utility meter viewing window

STANDARDS


- Consult utility for compliance
- UL listed
- Complies with ANSI C12.7
- Conforms to NEMA Standard for Type 3R

FINISH

- ANSI 61 Gray (consult sales for other finish requirements)
- See page 150 for additional finishes

ACCESSORIES

- Fifth jaw kit #50365 (200 amp service or below, single phase systems)
- Pad mounting base (see chart)

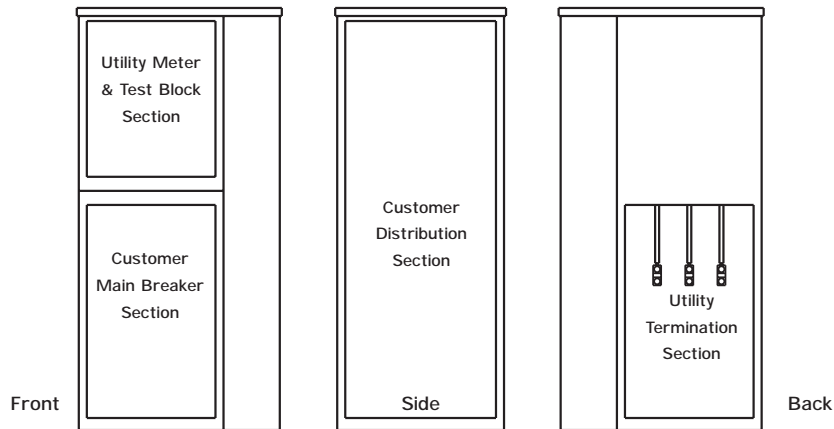

Pad Mount Metered

| CATALOG NUMBER | AMPACITY | VOLTAGE | PHASE | METER SOCKET | MAIN BREAKER | DISTRIBUTION & CONTROL | MOUNTING PAD |
|----------------|----------|---------|--------|--------------|--------------|----------------------------|--------------|
| CMP4911M | 100 | 240 | 1Ø, 3W | CD | 100/2 | Per Customer Specification | MB2820 |
| CMP4911MC | 100 | 240 | 1Ø, 3W | SS | 100/2 | | |
| CMP4911MCH | 100 | 480 | 1Ø, 3W | SS | 100/2 | | |
| CMP4914M | 100 | 240 | 3Ø, 4W | CD | 100/3 | | |
| CMP4914MC | 100 | 240 | 3Ø, 4W | SS | 100/3 | | |
| CMP4914MCH | 100 | 480 | 3Ø, 4W | SS | 100/3 | | |
| CMP4921M | 200 | 240 | 1Ø, 3W | CD | 200/2 | | |
| CMP4921MC | 200 | 240 | 1Ø, 3W | SS | 200/2 | | |
| CMP4921MCH | 200 | 480 | 1Ø, 3W | SS | 200/2 | | |
| CMP4924M | 200 | 240 | 3Ø, 4W | CD | 200/3 | | |
| CMP4924MC | 200 | 240 | 3Ø, 4W | SS | 200/3 | | |
| CMP4924MCH | 200 | 480 | 3Ø, 4W | SS | 200/3 | | |
| CMP4941MN | 320 | 240 | 1Ø, 3W | MCC | 400/2 | | |

CD = Standard - No By-Pass
3Ø, 3W systems also available

MCC = Manual Circuit Closing

SS = Safety Socket - Test By-Pass